

PERMATIMBER®

LOW MAINTENANCE. PRE-FINISHED. CLADDING

CX ORIGINAL CLADDING

PermaTimber® CX Original Cladding is a high-performance composite, which boasts minimal maintenance. Being far lighter than traditional external timber cladding products, our Cladding is faster and simpler to install. A full set of finishing trims are available for ease of install and a seamless finish.



Please ensure you download and read a copy of the **PermaTimber® Original CX Cladding** Installation guide prior to, and during your installation. Failure to do so will void your warranty.

You can download the guide by scanning the QR Code or visiting www.permacomposites.com/brochure-installation-guide-library/



PERMATIMBER®


CX ORIGINAL CLADDING

Features

- **Low Maintenance:** No oiling, painting, or staining is required!
- **Quick and Easy to Install:** Full trim system is available.
- **Insect and Salt Resistant:** Never fear white ants or termites again!
- **Eco - Friendly:** Made from 87% recycled materials.
- **UV Stabilised:** We've included UV inhibitors so colour holds.
- **Sleek Natural Look:** Get that traditional timber finish without the hassle.
- **Installation:** Can both be Installed vertical or horizontal.



Profile




Colours



Spotted Gum



Tasmanian Oak



Ebony

Distributor

Order Codes

Cladding - Ebony	CCXOREBOC
Cladding - Spotted Gum	CCXORSPGC
Cladding - Tasmanian Oak	CCXORTAOC

Specifications

Board Dimensions	150 x 21 x 5400mm
Span	600mm
Weight per Board	11.30kg
Weight per LM	2.4kg
Board SQM	0.81sqm
Weight per SQM	14kg


Certification

Fire Rating	4.2kw/m2
AS ISO 9239.1-2003_R2016	

***Fire Rating BAL19 version also available via custom order.**

*Please consult PermaTimber® for more information.

Fixings

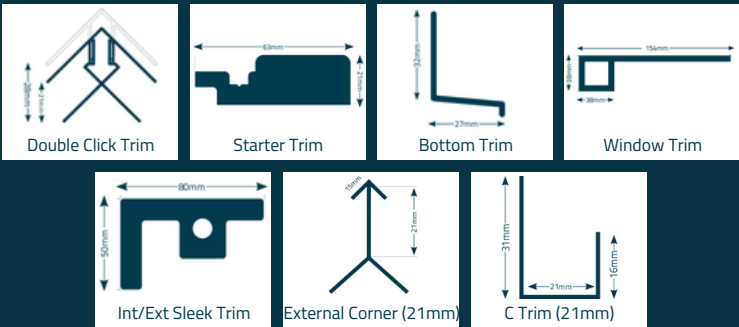

Please ensure the product is purchased in job lots for colour consistency. Colour may vary in different batches. It is the installers responsibility to ensure colour consistency prior to install.

*Photos for illustrative purposes only.

PERMATIMBER®