


# 225 Solid **Decking**

PermaTimber® 225 Decking is a sleek double-sided board that features a wood grain on one side and a reeded finish on the other. With a massive 750mm span, it is ideal for heavy traffic areas.

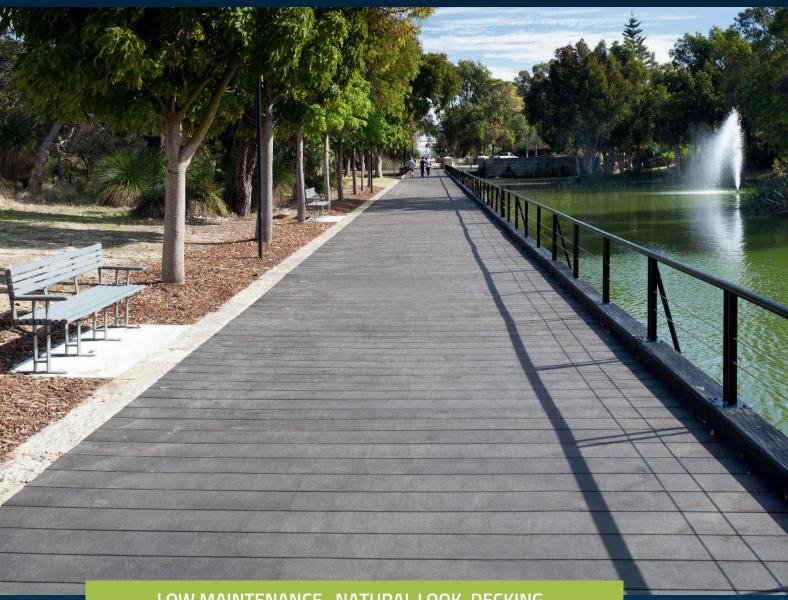

LOW MAINTENANCE. NATURAL LOOK. DECKING

Please ensure you download and read a copy of the PermaTimber® Decking Installation guide prior to, and during your installation. Failure to do so will void your warranty.

You can download the guide by scanning the QR Code or visiting www.permacomposites.com/ brochure-installation-guide-library




# 225 Solid Decking

#### **Features**

- Low Maintenance: No staining, painting or oiling required. Scratches easily sand out.
- Quick & Easy to Install: Thanks to our simple hidden fixing system.
- Sleek Natural Look: Get that traditional timber finish without the hassle.
- Non-Slip Surface: Ideal for poolside and coastal locations.
- Insect and Salt Resistant: Never fear white ants or termites again!
- UV Stabilised: We've included UV inhibitors so colour holds.
- Eco-Friendly: Made from 87% recycled materials.

#### **Profile**



#### **Finishes**

**PermaTimber® 225 Solid Decking** features a fully reversible design, giving you the choice between finishes.





#### **Colours**





### **Specifications**

Board Dimensions	225 x 30 x 5400mm
Max Residential Span	750mm
Max Commercial Span	600mm (3kpa)
Weight per Board	50kg
Weight per LM	9.26kg
Board SQM	1.22sqm
Weight per SQM	41kg

#### **Order Codes**

Amalfi	D225AS
Mykonos	D225MS

#### Certification

Fire Rating AS ISO 9239.1-2003_R2016	4.2kw/m2
Slip Resistance  AS/NZS4586:2013	P5 (Wood Grain) P5 (Reeded)

<sup>\*</sup>Please consult PermaTimber® for more information.

## **Fixings**



